

# ALEXGROUT BP



## Non Shrinkage-Solvent Free-Free Flowing-Epoxy Resin Grout

### Description

**ALEXGROUT BP** is three components solvent free epoxy resin grout formulated to withstand Static and dynamic loads in a wide variety of Applications. Easily mixed on site to Pourable Consistency, on shrinkage, Highly adhesive to concrete and steel surface. Free flowing-Non shrinkage grout.

### Uses

- To fill gaps in concrete structure.
- Steel columns for warehouses
- Concrete area subject to chemical attack.
- Under machines, equipment grout.
- Grout around anchor bolts, bockets, fixing bolts.
- Grout under steel columns, base plates in ware houses and storage areas.
- Dynamic crane nails (vibrated or high loads)

### Advantages

- Resist Dynamic load.
- No primer required
- High tensile, flexural and compressive Strength
- Solvent free
- Non shrink
- High bond strength
- High bond between concrete and steel Surface.
- High mechanical and physical properties.

- Chemical attack resistance.

### Surface preparation

- All surfaces must be sound, clean free from water Oil ,grease and other contaminants which may Affect the bond between grout and the substrate.
- Formwork must be tight to prevent any leakage.

### Properties

<b>Colour</b>	grey	
<b>Pot life</b>	AT 25°C	50 min
<b>Density</b>		2000kg/m3
<b>Full chemical cure</b>	AT 25°C	7 days
	AT 40°C	3 days
<b>Compressive strength</b>	24 hrs	100N/mm2

### Guide to application

#### **Mixing:**

Add component B (Hardener) to component A (Base) and mix by using low speed drill (250 r.p.m) till reach the homogeneity. During mixing A&B add the third component (C) aggregate to the mixed compound gradually (part by part). After reaching the homogeneity for the three components, still mix the mixture for at least 3 minutes.

## Standard:

### Compressive strength

ASTM D-695

### Tensile strength

ASTM D-638

### Flexural strength

ASTM C-293

### Bond strength (14 days cure)

ASTM C-882

### Water absorption

ASTM D-570

### Elongation at break

ASTM D-638

### Linear coefficient of shrinkage

### On curing

ASTM C-844

### Heat Deflection Temperature


ASTM D-648

### Coefficient of thermal Expansion

ASTM C-580

## Application:

- Self leveling grout normally no need for using vibrator.
- In large quantity use a thin rod vibrator.
- Pour the grout from one side using head to reach a continuous flow.
- Pour in single application with a maximum depth of 60 mm, for application deeper than 60 mm pour in lift of maximum depth 60mm, confirm the sealed shuttering.

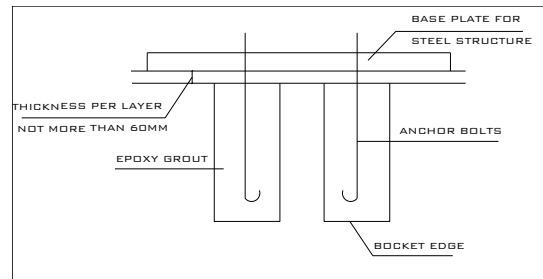

## Coverage:

18 Kg of **ALEXGROUT BP** will yield 9 lit.

## Storage:

Store under cover, out of direct sun  
And protect from extremes of temperature, in tropical climates, the product must be Stored in an air-conditioned environment  
Failure to comply with the recommended Storage conditions may result in premature Deterioration of the product or packing.

## Packing:

Is supplied in 18 kg.

## Shelf life:

Up to 12 months if stored in unopened Containers according to the manufactured Instructions

**Safety precautions:**

Avoid contact with eyes, mouth, and skin.

Treat splashes to skin and eyes immediately,

If accidentally ingested seek medical attention.

Re-seal containers after use.

**Guarantee:**

All precaution is taken in manufacture of each product to comply with the standard of each material.

The data sheet for each product for information only and may be corrected and no liability is accepted for it.

The results may have variation because the method of their use condition under which they are applied cannot be anticipated.

**Technical Service:**

For any technical advice for using the **ALEXCHEM** contact the technical office.

**HEAD OFFICE:**

12 Ibn saad,45 Miami ,Alexandria

Tel:03-5885431 Fax:03-5885253

mob: 01155444400

Website : [www.alexchem.net](http://www.alexchem.net)

Email : [info@alexchem.net](mailto:info@alexchem.net)

**FACTORY:**

ElNahda- Amrya -Alexandria

Tel/Fax:03-4770313